

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Publication number:

**0 271 249  
A1**

(12)

# EUROPEAN PATENT APPLICATION

(21) Application number: 87310356.8

(51) Int. Cl.4: B43K 21/20

(22) Date of filing: 24.11.87

(30) Priority: 25.11.86 JP 180740/86 U  
15.06.87 JP 91654/87 U

(43) Date of publication of application:  
15.06.88 Bulletin 88/24

(84) Designated Contracting States:  
DE ES FR GB IT

(71) Applicant: A.T. CROSS COMPANY  
1, Albion Road  
Lincoln, RI 02865(US)

Applicant: KOTOBUKI & CO., LTD.  
13 Nishi Kurisu-cho Shichiku Kita-ku  
Kyoto-shi Kyoto(JP)

(72) Inventor: Lozeau, Robert V.  
44, Follett Street  
Cumberland Rhode Island 02864(US)  
Inventor: Kageyama, Hidehei c/o Kotobuki &  
Co. Ltd.  
Kawagoe Factory 138 Inutake Aza Kujirai  
Ooaza Kawagoe-shi Saitama-ken(JP)


(74) Representative: Votier, Sidney David et al  
CARPMAELS & RANSFORD 43, Bloomsbury  
Square  
London WC1A 2RA(GB)

(54) Rotary knock type mechanical pencil.

(57) A rotary knock type mechanical pencil in which the forward (1) and rearward (17) outer cylinders are relatively rotated, a cam movement converting mechanism stored in the forward outer cylinder converts the rotary movement into an axial advancing or retracting movement, the lead feeding mechanism (7) may feed the lead of desired length from the extremity end of the mechanical pencil under a knocking operation in the shaft comprising: a cam cylinder (14) integrally rotating with the rearward outer cylinder (17); a rotary cam mechanism for converting the rotary movement of the cam cylinder into a reciprocating advancing or retracting movement while slidably contacting with the cam surface formed at the extremity end surface of the cam cylinder; a lead feeding mechanism including an advancing or retracting mechanism such as a cassette adapter for advancing or retracting the lead chuck attached to the extremity end under a reciprocating movement applied through the rotary cam mechanism, a lead chuck (9) for holding the lead,

and a tightening member (10) freely inserted into the extremity end of the lead chuck and for holding or releasing a lead of the lead chuck as its advancing movement is carried out.

FIG 1

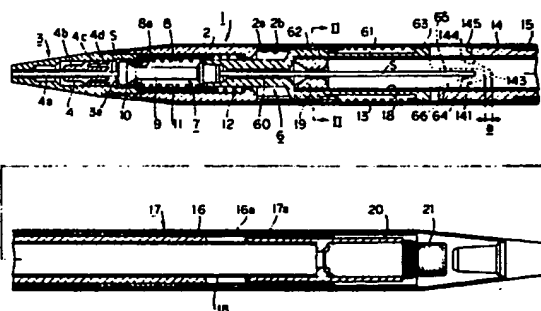

EP 0 271 249 A1

## ROTARY KNOCK TYPE MECHANICAL PENCIL

BACKGROUND OF THE INVENTIONField of the Invention

This invention relates to a rotary knock type mechanical pencil in which a lead feeding mechanism  
5 arranged in an outer cylindrical body including a forward outer cylinder and a rearward outer cylinder is operated to feed out a lead under a knock action by a relative rotation of these outer cylinders, and more particularly, a rotary knock type mechanical pencil in which the lead  
10 feeding mechanism within the body can perform a smooth and positive lead feeding operation under a relative rotation of the forward and rearward outer cylinders.

Description of the Prior Art

In recent years, various types of knock type  
15 mechanical pencils provided with some superior mechanisms such as an automatic lead feeding mechanism, an extremity end knock mechanism or the like have been proposed in the mechanical pencil field. These knock type mechanical pencils have, on the one hand, proved dependable for  
20 consumers due to ease and positiveness in operation and on the other hand, have some disadvantages in that the design spoils the outer aesthetic appearance due to the need to arrange a knock operating part either at an upper end of the body or at an outer circumferential side of  
25 the body. In view of this fact, there has been proposed

a rotary slide type of rotary knock type mechanical pencil having both a better outer appearance and a superior point in function of a knock type mechanical pencil.

5           The conventional type of the above-mentioned rotary knock type mechanical pencil is composed of a forward outer cylinder provided with a lead feeding mechanism at its inner extremity end side and a rearward outer cylinder having a cam cylinder therein which are  
10   rotatably connected to each other. This rotary knock type mechanical pencil is operated such that a writer holds one outer cylinder and the other outer cylinder is rotated in any direction, thereby the cam cylinder is rotated in a circumferential direction by a specified  
15   range, and the cam surface of the cam cylinder reciprocates an extended rod of the lead feeding mechanism abutting against the cam surface, resulting in generating a so-called cam movement. An operating force in a reciprocating direction converted from the cam  
20   movement may perform the knock operation of the lead feeding mechanism, resulting in that the lead is fed out of an extremity end of the mechanical pencil under the knock action.

          Examples of the conventional type of rotary knock  
25   type mechanical pencil described above, are disclosed U.S. Patent No. 4,269,524 and Hashimoto's U.S. Patent No. 4,362,410. These patents disclose that each of the

forward and rearward outer cylinders is connected to each other in such a way as they may be rotated with each other, wherein there is provided a lead feeding mechanism for performing a lead feeding operation in reference to  
5 a conversion of operation of a rotary cylinder 124 acting as a cam cylinder assembled in the shaft including these outer cylinders; a slant surface 132 acting as a cam surface formed at the rotary cylinder and the extended rod 13 abutted against the slant surface to convert the  
10 rotary movement into a reciprocating movement.

However, according to the rotary knock type mechanical pencil described in the above-mentioned U.S. Patent No. 4,269,524, at first, a lead feeding mechanism such as a tightening member receiver 113 for performing  
15 a lead feeding operation within a rotary cylinder 124 formed with a cam surface at its extremity end side, a tightening member 11 and a chuck 19 or the like is integrally formed with a lead case 20 at the rear end of the chuck, and in case of performing a lead feeding  
20 operation, so-called knock operation, all the component elements positioned at the inner central side of the mechanical pencil perform a reciprocating movement. Since the lead case 20 is set at its position only with a spring  $S_1$  within the rotary cylinder 124, a looseness  
25 is generated at the lead feeding mechanism within the mechanical pencil during the reciprocating movement and so a positive lead feeding operation can not be performed.

Secondly, the rotary cylinder 124 directly advances or retracts the tightening member receiver 113 through the extend rod 13 via its slant surface 132. Since this tightening receiver 113 advances or retracts to cause the tightening member 11 to fasten the chuck 19 or to release the fastening operation, a lead feeding operation of the tightening member 11 while being released from the chuck 19 is merely performed by chance, and a lead feeding operation with the rotary knock type mechanical pencil having this mechanism can be performed only in the case that the lead L drops together with the lead retainer 18 downwardly via extremity end of the mechanical pencil and so it has a problem that a positive lead feeding operation can not be performed.

Thirdly, although the mechanical pencil of U.S. Patent No. 4,269,524 has an advantage of requiring a fewer number of component elements, it has another problem that irrespective of the constitution having less number of parts, for example, it is necessary to form a guide groove 10, a projection 12, a receiving member 120 and a projection 121 or the like so as to guide a reciprocating movement of the lead feeding mechanism, resulting in a complex structure.

Fourthly, according to the patent, since a lead L is set for its position while the rotary cylinder 124 is rotated and the chuck 19 is fastened with the tightening member receiver 113 and the tightening member 11 so as to

perform a writing operation, it shows a problem that in case of a quite strong writing pressure of the writer, this strong writing pressure can not be dampened, the lead is frequently broken and under the worst condition the lead feeding mechanism or rotary mechanism is  
5 detrimentally affected.

#### SUMMARY OF THE INVENTION

This invention is provided to resolve the above-mentioned problems and accomplish the following  
10 objects.

It is the first object of the present invention to provide a rotary knock type mechanical pencil in which a lead feeding mechanism for feeding the lead from an extremity end of the mechanical pencil by a desired  
15 amount and a lead case storing leads and supplying a lead when a lead is not present in the lead feeding mechanism are separately made, thereby no looseness is generated in the inner mechanism when the lead feeding mechanism advances or retracts under a relative rotary operation of  
20 the outer cylinder to feed the lead and a positive lead feeding operation can be performed.

It is the second object of the present invention to provide a rotary knock type mechanical pencil in which a tightening member receiver for fastening or releasing a  
25 chuck against or from the tightening member is not directly advanced or retracted, but a cam engaging means, slid along a cam surface formed at a rotary cylinder to

perform an advancement or retracting movement, and a  
chuck are integrally formed to each other, a sleeve  
acting as a tightening member for fastening or releasing  
of chuck is separately arranged and at the same time each  
5 of a springs is arranged between the sleeve and an inner  
circumferential surface of the fixed shaft and between  
the sleeve and a movable cam engaging means, and a  
positive lead feeding operation can be performed under  
the actions of these springs not only in the case that  
10 the rotary knocking operation is carried out in a  
downward direction, but also in the case that for  
example the rotary knocking operation is carried out in  
upward direction..

It is the third object of the present invention to  
15 provide a rotary knock type mechanical pencil in which a  
superior assembling operation of an inner mechanism can  
be made, its manufacturing cost can be reduced to a less  
expensive value and it has less trouble during its  
secular use by a method wherein an arrangement of the  
20 component parts within the shaft and various mechanisms  
constituted by these component parts are simplified  
irrespective of much or less amounts of component parts.

It is the fourth object of the present invention to  
provide a rotary knock type mechanical pencil preventing  
25 a breakage of lead and improving a writing touch in which  
as described in the second object, each of the springs  
is arranged between a sleeve acting as a chuck tightening

member and a fixed part and between the sleeve and the movable part, respectively, and a reaction applied to the lead and the lead feeding mechanism from a sheet surface is dampened under a combination of the springs in case  
5 that a writer showing a strong writing pressure writes.

In order to accomplish the above-described objects, the rotary knock type mechanical pencil of the present invention is comprised of a cam cylinder which has a cam surface at its extremity end and is integrally rotated  
10 with a rearward outer cylinder; and a lead feeding mechanism including a lead guide having at its rear end side a cam engaging means to be engaged with the cam surface of the cam cylinder, at its extremity end side a lead chuck capable of holding or releasing of a lead  
15 connected thereto and stored in the forward outer cylinder in such a way as it may be advanced or retracted under a rotation of the cam cylinder; a tightening ring for fastening or releasing the extremity end side of the chuck fixed to the lead guide; a sleeve arranged at an  
20 outer circumferential side of the chuck so as to restrict a movement of the ring toward the rear end direction which is advanced or retracted together with the chuck; and a slider arranged within a member at the extremity  
25 end of the shaft to hold an outer circumference of the lead with a specified frictional force and sliding in the member at the extremity end.



BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a sectional view for showing a mechanical pencil of the first preferred embodiment of the present invention;

5        Fig. 2 is a sectional view taken along a line II-II of Fig. 1;

Fig. 3 is a sectional view for showing the second preferred embodiment of the present invention which is a modified form of the invention;

10       Fig. 4 is a top plan view of a cam cylinder of the mechanical pencil of the first preferred embodiment of the present invention;

Fig. 5 is a sectional view taken along a line V-V of Fig. 4;

15       Fig. 6 is a developed view for illustrating an action of the cam cylinder;

Fig. 7 is a sectional view for showing a substantial part of the mechanical pencil of the third preferred embodiment of the present invention;

20       Fig. 8 is a sectional view taken along a line VIII-VIII of Fig. 7;

Figs. 9A, 9B and 9C illustrate a longitudinal section of a fourth preferred embodiment of the mechanical pencil of the present invention, respectively representing a front section, a midsection and a rear section of the pencil;

25

Fig. 10 is a sectional view taken along a line X-X  
of Fig. 9A;

Fig. 11A and Fig. 11B are an illustrative perspective  
view showing a rotary cam mechanism;

5        Fig. 12 is a sectional view taken along a line  
XII-XII of Fig. 9B;

Fig. 13 is a developed illustrative view for showing  
a cam surface;

10       Fig. 14 is a sectional view taken along a line  
XIV-XIV of Fig. 9B;

Fig. 15 is a longitudinal section illustrating a  
second connecting means between a cam and a driver;

Fig. 16 is a side elevational view showing a cam;

15       Fig. 17A is a sectional view taken along a line A-A  
of Fig. 16;

Fig. 17B is a sectional view taken along a line B-B  
of Fig. 16;

Fig. 18 is a top plan view showing a driver;

20       Fig. 19A is a sectional view taken along a line  
XIX-XIX of Fig. 18 and Fig. 19B is a sectional view taken  
along a line XX-XX of Fig. 18;

Fig. 20 is a longitudinal section showing the third  
connecting means;

25       Fig. 21 is a partial longitudinal section for showing  
a driver;

Fig. 22 is a side elevational view for showing a  
cam;

Fig. 23 is a longitudinal section for showing the fourth connecting means;

Fig. 24 is a perspective view for showing a driver;

Fig. 25 is a side elevational view for showing a cam;

5 Fig. 26 is a longitudinal section for showing the fifth connecting means;

Fig. 27 is a sectional view taken along a line C-C of Fig. 26;

10 Figs. 28A, 28B and 28C are perspective views showing alternate press fitting engaging members;

Fig. 29 is a sectional view showing the sixth connecting means;

Fig. 30 is a sectional view taken along a line D-D of Fig. 29;

15 Fig. 31 is a perspective view showing the sixth connecting means;

Fig. 32 is a lateral section for showing the seventh connecting means; and

20 Fig. 33 is a front elevational view showing a resilient opening or closing part.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings, preferred embodiments of the present invention will be described.

25 In Fig. 1, there is shown a mechanical pencil of the first preferred embodiment. Reference numeral 1 designates a forward outer cylinder, reference numeral 2 a forward inner cylinder which is engageably inserted

into the forward outer cylinder 1 from a rear end thereof. A rear end side of a tip element 3 is engageably screwed into the forward end of the forward inner cylinder 2.

5           The tip element 3 and the forward inner cylinder 2 are fastened and fixed through this screw threading.

          Within the tip element 3, a slider 4 is axially and slidably arranged for projection out of or retraction into the extremity end of the tip element.

10           The slider 4 is comprised of a lead guide pipe 4a and a slider member 4b fixed to the rear end of the lead guide pipe 4a, supporting a lead S at the inner circumferential surface with a specified frictional resistance and sliding against an inner circumferential surface of the tip element 3 at the outer circumferential surface of the slider under a larger frictional resistance than the above-mentioned specified frictional resistance.

15           The slider member 4b is integrally made of ABS resin or polyacetal or the like, and has a resilient sliding piece 4c for supporting a lead S sliding with the lead guide 4a with the above-mentioned specified frictional resistance and a sliding piece 4d sliding contacted with an inner circumferential surface of the tip member 3 arranged in an outer diametrical direction of the sliding contact piece 4c with a larger frictional resistance than the above-mentioned frictional resistance.

In turn, a rear large diameter inner hole 2a of a large diameter stepped shape is arranged at the rear part of the forward inner cylinder 2.

5 A lead guide 6 is axially and slidably inserted into the forward inner cylinder 2 from the rear large diameter inner hole 2a and a lead feeding mechanism 7 is arranged at an extremity end of the lead guide 6.

The lead feeding mechanism 7 is comprised of a sleeve 8 axially and slidably inserted into the forward  
10 inner cylinder 2, a lead chuck 9 fitted and connected to an extremity end of the lead guide 6 and axially and movably inserted into the sleeve 8, a chuck tightening ring 10 outwardly fitted to the extremity end of the lead chuck 9, and a first resilient body 11, such as a spring,  
15 is resiliently fitted between a projection 8a inwardly projected into the extremity end of the sleeve 8 and the extremity end of the lead guide 6 and biasing the chuck tightening ring 10 in a forward direction (a chuck tightening direction) through the sleeve 8.

20 Within the forward inner cylinder 2, a second resilient body 12, such as a spring, is provided for biasing the sleeve 8 in a forward direction.

The lead guide 6 has a lead insertion hole 60 arranged from a part near its intermediate portion to an  
25 axial central part at the extremity end and a large diameter cylinder 61 integrally formed at the rear end part of the lead insertion hole 60 and axially and

slidably fitted into the rear large diameter inner hole 2a of the forward inner cylinder 2. This large diameter cylinder 61 is extended into the forward outer cylinder 1.

Although the lead guide 6 can be axially slid within the forward inner cylinder 2, this guide is engaged within the forward inner cylinder 2 fixed against rotation.

As shown in Figs. 1 and 2, a rotation preventive projection 62 integrally projected at a forward outer circumferential surface of the large diameter cylinder part 61 of the lead guide 6 is, as this engaging means, fitted and engaged in an axial groove 2b formed in the rear large diameter inner hole 2a of the forward inner cylinder 2. This engaging means may be made such that the rotation preventive projection 62 is integrally projected at the rearward large diameter inner hole 2a and the axial groove 2b may be formed at an outer circumferential surface of the large diameter cylinder part 61.

As found in the second preferred embodiment shown in Fig. 3, an inner circumferential surface of the rearward large diameter inner hole 2a and an outer circumferential surface of the large diameter cylinder part 61 may be formed as a regular polygonal shape, they may be axially and slidably fitted to each other to make the engaging means.

The lead guide 6 is biased in its retracting direction by a third resilient body 13, such as a spring,

resiliently fitted between an outward projection 63 at its rear end and the rear end of the forward inner cylinder 2.

5 The third resilient body 13 is for fastening the lead chuck 9 with the chuck tightening ring 10 by rearwardly moving the lead chuck 9 integrally with the lead guide 6. The first and third resilient bodies 11 and 13 may perform the same action, so either one of them may be eliminated.

10 The rearward circumferential wall of the lead guide 6 is integrally formed with a cam engaging piece (cam engaging means) 64. A cam cylinder 14 is inserted into the rear part of the forward outer cylinder 1 in such a manner as it may be rotated at its specified position.

15 Now, a relative construction of the cam cylinder 14 and the cam engaging piece 64 will be described.

The cam engaging piece 64 has a stopper surface 65 axially extending so as to restrict one-directional rotation of the cam cylinder 14 and a curved slant surface 66 formed around a substantial half circumference of a circumferential wall from the extremity end of the stopper surface 65.

20 The cam cylinder 14 is provided at its forward end an axially extending stopper surface 140 engageably or disengageably abutted against the stopper surface 65 (see Figs. 4 and 5), a large cam surface 141 curved and slanted from an extremity end of the stopper surface 140

to its substantial half circumference thereof, a small cam surface 144 curved and slanted from the rear end engaging part 143 arranged at the rear end of the large cam surface 141 to the rear end of the stopper surface 140, and an intermediate engaging part 145 arranged at a front end of the small cam surface 144 and at a rear end of the stopper surface 140. Each of the rear end engaging part 143 and the intermediate engaging part 145 is formed as a concave form.

10       The rear end of the cam engaging piece 64 is press engaged under a biasing force of the third resilient body 13 with any one of the large cam surface 141, the rear end engaging part 143 and the small cam surface 144 of the cam cylinder 14.

15       In the cam cylinder 14, the rear end engaging part 143 is defines a writing position and the intermediate engaging part 145 is defines a chuck releasing and locked position when the lead is to be stored, the large cam surface 141 is a cam surface for use in feeding the lead also acting as means for feeding the lead guide 4a, and the small cam surface 144 is a cam surface for releasing the chuck.

25       Thus, the cam engaging piece 64 is pushed with the large cam surface 141 under one directional rotation of the cam cylinder 14, the cam engaging piece 64 is substantially moved toward the extremity end of the large cam surface 141, thereby the lead guide 4a is projected



out of the tip element 3 and as the cam cylinder 14 is reversely rotated in an opposite direction after projection, the cam engaging piece 64 is advanced again with the large cam surface 141 and then the lead S is fed out from the extremity end of the lead guide 4a. Further, as the cam cylinder 14 is substantially rotated in an opposite direction, the cam engaging piece 64 is engaged with the intermediate engaging part 145 along the small cam surface 144 and thus the lead feeding mechanism 7 is kept at the chuck released condition.

Therefore, under the chuck released condition, as the lead S projected from the extremity end of the lead guide pipe 4a is pushed against a paper sheet or the like, the lead S is retracted back into the lead guide pipe 4a and then the slider 4 is retracted and stored in the tip element 3 together with the lead S.

With this arrangement, in case of carrying the writing instrument, there is no chance for the lead guide 4a to project out of the extremity end of the tip element 3 and so it is possible to prevent damage to the cloth, for example, of a shirt pocket, or the like, with the projected extremity end of the lead guide 4a in advance.

In this case, as shown in Fig. 1, a distance a acting as a margin for absorbing a shock is arranged between the rear end of the cam engaging piece 64 and the rear end engaging part 143.

Hence, in case an excessive writing pressure is applied to the lead during writing operation, the second cushion resilient body 12 is compressed in order to prevent a breakage of the lead S or the like and then the lead pipe 18 is retracted and stored in the cylinder.

Thus, as the cam engaging piece 64 of the lead guide 6 is abutted against the cam cylinder 14 under this retraction and storing condition, this results in generating a forward pressing force for the lead feeding mechanism 7, so that the lead chuck 9 is released to generate a looseness of the lead. A distance a acting as a margin of cushion is provided to prevent the sliding of the lead.

An intermediate ring 15 is rotatably and freely fitted in an outer circumferential surface of the cam cylinder 14 and this intermediate ring 15 is fitted and fixed to a rear inner side of the forward outer cylinder 1.

To the rear end of the cam cylinder 14 is integrally connected a rear side cylinder 16 and a rear side outer cylinder 17 is engageably or disengageably press fitted to the rear side cylinder 16.

Under this press fitted condition, the rear side cylinder 16 and the rear side outer cylinder 17 are engaged at their axial directions with their frictional engaging force, thereby the cam cylinder 14 is rotatable together with the rear side outer cylinder 17.

As shown in Fig. 1, an axial groove 16a is arranged at an outer circumferential surface of the rear side cylinder part 16 and a rotation preventive projection 17a is arranged at an inner circumferential surface of the rear side outer cylinder 17, respectively, and this rotation preventive projection 17a is fitted and engaged with the axial groove 16a, thereby the rear side cylinder 16 of the cam cylinder 14 may be engaged within the rear side outer cylinder 17 in an axial direction and so any engaging means can be applied.

Within the cam cylinder 14 is removably inserted a lead pipe 18 from its rear portion, and the extremity end of the lead pipe 18 is removably inserted into the large diameter cylinder 61 of the lead guide 6.

Therefore, the lead pipe 18 comprises a lead cartridge which can be removed from the lead guide 6 and the cam cylinder 14 in the preferred embodiment. The lead pipe 18 may be made integrally with either the lead guide 6 or the lead chuck 9 which is connected at its extremity end.

In such a lead pipe 18 as described above, a lead guide member 19 is arranged within the extremity end and further a rubber eraser receiving cylinder 20 is integrally connected to the rear end part.

To this rubber eraser keeping cylinder 20 is fitted or supported a base end part of the rubber eraser 21.

The assembly of the writing instrument will now be described. At first, after the forward inner cylinder 2 is inserted into the forward outer cylinder 1 at its rearward end, the tip element 3 is threadably engaged in the extremity end of the forward inner cylinder 2.

With this arrangement, the forward inner cylinder 2, the lead feeding mechanism 7 and the lead guide 6 are fitted and set in the forward outer cylinder 1 under their united condition.

Then, the cam cylinder 14 is inserted into the rear end side of the forward outer cylinder 1 and the intermediate ring 15 is fitted and fixed to the rear end inner part of the forward outer cylinder 1.

Under this condition, the lead pipe 18 is inserted into the cam cylinder 14 from its rear end, thereby the extremity end of the lead pipe 18 is fitted into the large diameter cylinder 61 of the lead guide 6.

After that, the rear side outer cylinder 17 is press fitted into the rear side cylinder 16 of the cam cylinder 14 from the rear end of the lead pipe 18 to complete an assembling operation of the writing instrument.

Now, operation of the writing instrument will be described. When the cam engaging piece 64 of the lead guide 6 is engaged with the intermediate engaging part 145 of the cam cylinder 14, each of the lead guide pipe 4a and the lead S is retracted and stored in the tip element 3.

As the rear outer cylinder 17 is substantially rotated in one direction from this condition, the cam cylinder 14 is integrally rotated together with the rear outer cylinder 17, thereby the engaged condition between the intermediate engaging part 145 and the cam engaging piece 64 is released, and the cam engaging piece 64 is moved toward the large cam surface 141 through the small cam surface 144.

When the cam engaging piece 64 is pushed with the large cam surface 141, the lead guide 6 which is integral with the cam engaging piece 64 is advanced and the lead guide pipe 4a of the slider 4 is then projected from the tip element 3 through the lead feeding mechanism 7.

Then, after the rear part outer cylinder 17 is rotated back in an opposite direction, and again slightly rotated in one direction, the cam engaging piece 64 is advanced again with the large cam surface 141 of the cam cylinder 14 which is integrally rotated with the rear part outer cylinder 17.

With this arrangement, the lead feeding operation is carried out to feed out the lead S from the lead guide 4a.

In this case, a repetition of a normal or an opposite rotation of the cam cylinder 14 caused by the rear outer cylinder 17 may adjust a feeding length of the lead.

After such a lead feeding operation, the cam engaging piece 64 is positioned at the rear end engaging part 143 of the cam cylinder 14 and so a writing can be performed.

When the cam cylinder 14 is substantially rotated in an opposite direction with the rear outer cylinder 17, the cam engaging piece 64 is moved to the small cam surface 144, the cam engaging piece 64 is advanced with the small cam surface 144 and then the lead guide 6 and the lead feeding mechanism 7 are advanced together with the cam engaging piece 64.

During this advancing process, the chuck tightening ring 10 is abutted at its front end against a rear step 3a in the tip element 3 and stopped there. The lead chuck 9 is further advanced to cause the fastening with the chuck tightening ring 10 to be released, resulting in making a chuck released condition and under this condition the cam engaging piece 64 is engaged with and locked with the intermediate engaging part 145.

Therefore, under this condition, if the lead S projecting from the lead guide pipe 4a and the lead guide pipe 4a are pushed against the paper sheet or the like, these lead S and the lead guide pipe 4a are gradually retracted and stored in the tip element 3.

Further, since the slider 4 may apply a desired frictional force against the lead S and the inner circumferential surface of the tip element 3 through the slider member 4, a mere pushing of the extremity end of the lead S against the paper sheet or the like without applying any knocking action when the lead guide pipe 4a is at a retractable position enables the lead S to be

projected by a desired length. This can be accomplished with a simple construction and assembly operation, without the use of a cylinder or a frictional member as found in the prior art, but by using a slider member 4b acting as one synthetic resin molded product.

Since a large amount of slider member 4b can be obtained less expensively and a length of the slider member can be reduced, it may be helpful for shortening an entire length of the mechanical pencil.

Thus, it is not necessary to feed a lead under a knocking operation while the lead S is consumed by an amount corresponding to a distance where the lead guide pipe 4a can move and so a subsequent writing can be continued without regripping of the pencil.

In Fig. 7 is illustrated the third preferred embodiment. In this embodiment, the second resilient body 12 shown in Fig. 1 is eliminated by providing a so-called cushion sleeve 8 having a cushion part 8a axially extendable or retractable formed integrally with the rear end side of the sleeve 8 shown in Fig. 1. Further, in this embodiment, a slider 22 which is separate from the lead guide 6 is arranged at the rear end of the lead guide 6. This slider 22 is axially and slidably inserted into the rear portion of the forward outer cylinder 1, engaged at its axial portion and biased by the third resilient body 13 in a retracting direction. Then, the cam engaging piece 64 is integrally

formed with the rear end of the slider 22. In case of this preferred embodiment, there is provided a distance a acting as a margin of cushion between the rear end of the lead guide 6 and the front end of the slider 22.

5 Therefore, also in this embodiment, the same actions and effects as those of the first and second preferred embodiments can be attained.

Referring now to Figs. 9 to 33, the fourth preferred embodiment of the present invention will be described.

10 The fourth preferred embodiment is provided for facilitating an assembling operation, wherein the outer cylinder 1 is comprised of a forward outer cylinder 1a and a rearward outer cylinder 1b rotatably connected to the forward outer cylinder 1a.

15 As described later, rotation of the rearward outer cylinder 1b performs (i) a lead feeding operation for the lead S, (ii) a forward movement of the slider 4 and (iii) a releasing of the lead chuck 9 and a storing of the slider 4.

20 Thus, within the outer cylinder 1 are provided a barrel adapter 50 press fitted and fixed, a lead feeding mechanism 7, a lead pipe 18 provided with an opening or closing mechanism 70 and a rotary cam mechanism 90.

The lead feeding mechanism 7 has a mechanism adapter 25 100 fixed to the barrel adapter 50 (see Fig. 10), a cassette adapter 110 slidably arranged in the mechanism adapter 100 and engaged in an axial groove 100a where the



projection 110a is formed from the rear end of the mechanism adapter 100 forwardly (see Figs. 9 and 11), a lead chuck 9 fitted to the extremity end of the cassette adapter 110, a chuck tightening ring 10 externally fitted to a head part of the lead chuck 9, a sleeve 8 abutted against the rear part of the chuck tightening ring 10 and slidably arranged within the mechanism adapter 100, a second resilient body 13 resiliently fitted between the sleeve 8 and the stepped part 100b of the mechanism adapter 100, and a first resilient body 11 for use in tightening a chuck is resiliently fitted between the sleeve 8 and the cassette adapter 110.

To the extremity end of the mechanism adapter 100 is removably fitted the tip element 3 and in turn to the rear side is fitted a cylindrical upper housing 160.

Within the tip element 3 is slidably arranged a slider 4.

This slider 4 is comprised of a lead guide pipe 4a and a slider member 4b fixed to the rear end of the lead guide pipe 4a and supporting the lead at its inner circumferential surface with a specified frictional resistance.

To the inner wall of the extremity end of the tip element 3 is fixed a lead guide friction applying part 170 slidably contacting with the lead guide pipe 4a with a larger frictional force than the lead frictional resistance of the slider member 4b.

The slider member 4b is integrally formed by ABS resin or polyacetal or the like.

As shown in Figs. 9B and 11, the rotary cam mechanism 90 is rigidly connected and fixed to a driver 180 described hereafter. The rotary cam mechanism 90 is provided with a cam 200 having the cam surface 190 inserted into the upper housing 160, a cam bearing 201 and a cam follower 202 (see Fig. 9B) having a sliding element 202a abutting against the cam surface 190 of the cam 200, as seen in Fig. 11A, sliding axially under a rotation of the cam 200 and feeding the lead S.

Between the cam follower 202 and the mechanism adapter 100 is resiliently fitted a third return resilient body 203. The sliding element 202a of the cam follower 202 is always press abutted against the rearward cam surface 190 to prevent an axial rotation of the cam follower 202.

At the extremity end of the cam follower 202 is formed an adapter hole 202b axially and slidably storing and engaging with the rear end of the cassette adapter 110.

As shown in Figs. 9, 11 and 12, in the adapter hole 202b is axially formed an adapter rotation preventive groove 202c engaging with the rotation preventive projection 110c of the cassette adapter 110, restricting an axial rotation of the cassette adapter 110 and integrally rotated with the cam 200. In Fig. 9, the

distance a between the rear end of the cassette adapter 110 and an inner wall stepped part 202d of the cam follower 202 is a margin of cushion. That is, as described later, this distance is a space applied in case  
5 that the lead chuck 9 and the cassette adapter 110 or the like are retracted and moved when an excessive writing pressure is applied to the lead S and also a retraction tolerance amount.

Referring now to Figs. 11 and 13, the cam surface  
10 190 of the cam 200 and the structure of the sliding element 202a of the cam follower 202 will be described.

At first, the sliding element 202a has a stopper surface 202a<sub>1</sub> axially extending in order to restrict one directional rotation of the cam 200.

15 In turn, the cam surface 190 is comprised of (i) a released cam surface area Y for releasing the lead chuck with the point X being as an interface point, and (ii) a knock cam surface area Z where the slider 4 may advance or perform a feeding of lead.

20 Then, the condition in which the sliding element 202a is positioned at the point X corresponds to the normal cases such as a writing time and a non-writing time or the like other than a lead feeding operation, a slider 4 moving operation and a lead chuck 9 releasing  
25 operation.

The released cam surface area Y is comprised of a released and curved cam surface 190a<sub>1</sub> extending from a

point X in one direction in a curved form, a sliding element stopped part 190a<sub>2</sub> formed at the terminal end of the released and curved cam surface 190a<sub>1</sub> and a released stopper surface 190a<sub>3</sub> abutting against the stopper surface 202a<sub>1</sub> of the sliding element 202a.

Then, when the cam 200 is rotated as indicated by an arrow L<sub>1</sub> in Fig. 11, the lead chuck 9 is gradually released as the sliding element 202a is moved from the point X on the curved cam surface 190a<sub>1</sub> as indicated by an arrow L<sub>2</sub> in Fig. 13 and as described later it is applied as a chuck released and locked position when the slider 4 can be stored.

In turn, the knock cam surface area Z has a knock curved cam surface 190b<sub>1</sub> extending from the point X to other directions as shown in Fig. 13.

The knock curved cam surface 190b<sub>1</sub> may act as a cam surface for use in feeding a lead and advancing the slider 4.

That is, as the cam 200 is rotated as indicated by an arrow R1 in Fig. 11A, the sliding element 202a is moved by the knock curved cam surface 190b<sub>1</sub> as shown by an arrow R2 in Fig. 13, and during this process, a lead feeding mechanism such as the cam follower 202, cassette adapter 110 and lead chuck 9 or the like is advanced. In case the rotation of the cam 200 is slightly rotated (in case of a small knock), only a lead feeding operation is performed. In case a rotation of the cam 200 is

substantially increased (in case of a strong knock), the lead feeding mechanism 7 is further advanced, so that a pushing and advancement of the slider 4 are carried out in addition to the lead feeding operation.

5           To the cam 200 is connected and fixed a driver 180 having a rearward outer cylinder 1b fitted and fixed thereto through various means. In Figs. 9 and 11, a reference numeral 204 designates a driver bearing.

          Figs. 9B and 14 indicate a first connecting and  
10       fixing means for the cam 200 and the driver 180. In this preferred embodiment, an outer circumferential surface of the cam rod 200a of the cam 200 is formed with a driver engaging stepped part 200b and a rotation preventive groove 200c.

15           In turn, a fitting part 180a of the driver 180 is substantially formed as a cylindrical shape in such a manner as the cam rod 200a is outwardly fitted, an inner stepped part 180b is engaged with the driver engaging stepped part 200b, an inner projecting piece 180c is  
20       engaged with the rotation preventive groove 200c so as to fixedly fit them to each other.

          Figs. 11A, 11B and 15 to 19 show the second connecting means. In the preferred embodiment, the cam rod 200a is formed with a rotation preventive groove 200c  
25       and an engaging projecting piece 200d projected outwardly and projectable or retractable in a diametrical direction. In turn, the substantial cylindrical fitting part 180a of

the driver 180 is formed with an inner projecting piece 180c engaged with the rotation preventive groove 200c and a concave part 180d for holding and press fitting the engaging projection piece 200d, the fitting part 180a is  
5 press fitted to the cam rod 200a, and both of them are forcedly fitted to each other.

As the cam 200 is inserted into the upper housing 160 from a direction indicated by an arrow (C) of Fig. 15 and the engaging projection piece 200d of the cam rod  
10 200a passes through the driver bearing 204, the engaging projection piece 200d is projected in a diametrical direction and formed in such a manner as it may not be dropped off the driver bearing 204. As indicated in Fig. 11, a wedge or the like is press fitted into the  
15 groove 200d<sub>1</sub> of the engaging projection piece 200d and a more positive projecting position is assured. The driver bearing 204 may be eliminated as shown in Fig. 15.

Figs. 20 to 22 illustrate the third connecting means, wherein a plurality of inner stepped portions 180e are  
20 formed at the fitting part 180a of the driver 180 and inserted into a bent groove 200e formed at the cam rod 200a of the cam 200, twisted, engaged and fitted therein.

Figs. 23 to 25 illustrate the fourth connecting means, wherein a projecting part 200f is formed at a cam  
25 rod 200a of the cam 200, it is inserted into a bent groove 180f of the fitted part 180a of the driver 180 and twisted, thereafter press fitted.

Figs. 26 to 28 illustrate the fifth connecting means, wherein a fitting part 180a of the driver 180 is press fitted into the cam rod 200a and both of them are formed with insertion grooves 180g and 200g. The  
5 insertion grooves 180g and 200g are coincided to each other, a press engaging member 205 for generating a lateral pushing force is press fitted into the grooves so as to forcedly fit and fix the cam rod 200a and the fitting member 180a.

10 In this case, the press fitting engaging member 205 may be formed in any shape if it may generate a lateral pressing and fitting force for fitting the cam rod 200a and the fitting part 180a, and for example, one shown in Fig. 28A to Fig. 28C can be illustrated. In the  
15 preferred embodiment, two fitting and engaging members 205 are press fitted and one or more than three fittings may be applied.

Figs. 29 and 31 illustrate the sixth connecting means, wherein a substantial  $3/4$  of arcular stopping cylinder 206 is fitted outwardly from the fitting part  
20 180a of the drive press fitted into the cam rod 200a. This stopping cylinder 206 has a bent part 206a bend inwardly, this bent part 206a is inserted into the insertion grooves 180h and 200h of the driver 180 and  
25 the cam rod 200a, respectively, a compressing force in a reduced diameter direction is applied to the fitted part 180a of the driver 180 so as to perform a rigid fitting described above.

Fig. 32 shows the seventh connecting means, wherein the fitting part 180a of the driver 180 and the cam rod 200a are forcedly fitted to each other with the stopping cylinder 206. A point differing from the stopping  
5 cylinder for the sixth connecting means consists in that its shape is made as a substantial 1/2 arcular form and both ends are inserted into the insertion grooves 180h and 200h as the bent portions 206a and 206a.

In this preferred embodiment, as the lead pipe 18,  
10 a so-called cassette type to be removably fitted in the cassette adapter 110 is used, an opening or closing mechanism 70 is installed at the extremity end thereof and a removable rubber eraser part 27 is installed at the rear end thereof.

15 The opening or closing mechanism 70 has an end plug 28 removably arranged at the extremity end of the lead pipe 18 as shown in Fig. 9A and a resilient opening or closing part 29 fitted to the end plug 28. As shown in Fig. 9A, when the lead pipe 18 is inserted into the  
20 cassette adapter 110, a pipe 30 for releasing the resilient opening or closing part 29 is fitted into the cassette adapter 110.

In this case, the resilient opening or closing part 29 is made such that before insertion of the cassette  
25 adapter 110, the lead S can not be moved through the groove 29a, as shown in Fig. 33A to Fig. 33C and in turn in case of insertion, the groove 29a is widened as



indicated in Fig. 9, resulting in that one lead can be moved through the groove.

Sizes of outer diameters of the mechanism adapter 100, upper housing 160 and driver 180 or the like are  
 5 determined in such a manner as they may be dropped from their rear portions and assembled into the forward outer cylinder 1a and rearward outer cylinder 1b.

Then, an assembling operation of the mechanical pencil will be described.

10 At first, after the cam bearing 201, cam 200 and cam follower 202 are inserted from the extremity end of the upper housing 160, the third resilient body 203 and a cassette adapter 110 of the pre-united lead feeding mechanism 7 are similarly inserted from the extremity  
 15 end of the upper housing 160. Then, the fitted part 180i at the extremity end of the upper cylindrical housing 160 is press fitted and fixed to the mechanism adapter 100.

In turn, the cam 200 inserted into the upper housing 160 projects its cam rod 200a rearwardly. To  
 20 this cam rod 200a is fitted and fixed the driver 180 with the above-mentioned means through the driver bearing 204. The driver 180 is press fitted and fixed the rearward outer cylinder 1b.

In this way, the united lead feeding mechanism 7,  
 25 rotary cam mechanism 90, lead pipe 18 and rearward outer cylinder 1b are dropped and inserted into at the rear part of the forward outer cylinder 1a. In this case,

since the mechanism adapter 100 and the cassette adapter 110 or the like have a smaller diameter than that of the forward outer cylinder 1a, they may smoothly be inserted. After that, the tip element 3 is fitted to the extremity  
5 end 180j of the mechanism adapter 100 to complete the assembly operation.

The operation of the mechanical pencil will be described now.

The condition shown in Fig. 9 is a state where the  
10 slider 4 is locked and stored in the pencil. Therefore, the sliding element 202a of the cam follower 202 is positioned at the sliding element engaging part 190a<sub>2</sub> shown in Fig. 13.

As the rearward outer cylinder 1b is rotated from  
15 this condition in a direction indicated by an arrow R1 of Fig. 11, the rearward outer cylinder 1b and the cam 200 are integrally rotated, so that the sliding element 202a is relatively moved in a direction indicated by arrows L2, R2 on the cam surface 190 as shown in Fig. 13,  
20 passes from the released cam surface area Y to the point X and advances to the knock cam surface area Z.

Along with this movement, the lead feeding mechanism 7 also advances and the lead feeding is carried  
out during a process of advancing movement, the extremity  
25 end of the lead chuck 9 pushes and advances the slider 4 under a further substantial advancing movement later, and the lead guide pipe 4a advances to the position

indicated by a dotted line in Fig. 9A. As the hand is removed from the rearward outer cylinder 1b, the rotary cam mechanism 90 is pushed rearwardly with the third resilient body 203, resulting in that the sliding  
5 element 202a is relatively returned back on the cam surface 190 and stopped at the position of point X. Then, in case that the lead S is worn out, the rearward outer cylinder 1b is slightly rotated in a direction of arrow L1 in Fig. 11A and the lead is fed. The slider 4  
10 is positioned at a location where the lead guide 4a is projected out of the tip element 3, so that when under this condition if the lead guide pipe 4a is pushed against the paper sheet or the like, a part of the lead feeding mechanism 7 such as the lead guide pipe 4a, lead  
15 chuck 9 having the lead S fitted therein and sleeve 8 or the like is retracted inwardly and moved with the second resilient body 13 compressed by the pushing force.

Then, as the pushing force of the lead guide pipe 4a is released, the lead guide pipe 4a is stopped at the  
20 lead guide friction applying part 170. However, the lead S held by the lead feeding mechanism 7 is returned back to its original position together with the lead feeding mechanism 7 under a resilient force of the second resilient body 13, resulting in that the lead S is  
25 projected from the extremity end of the lead guide pipe 4a so writing can be carried out.

In this way, it becomes unnecessary to feed the lead under the knocking operation while the lead S is worn out by an amount corresponding to the area where the lead guide pipe 4a can move and so the writing can be continued subsequently without regripping the pencil.

Further, in order to return the slider 4 to the extremity end position of its movement, the rearward outer cylinder 1b is rotated to perform a knocking action, either the extremity end of the lead chuck 9 or the slider 4 is pushed or advanced and moved to the position of the moved extremity end.

Upon completion of a writing operation, the slider 4 is conveniently stored in the tip element 3 and the lead S and cloth are conveniently protected from being damaged. As the rearward outer cylinder 1b is rotated in a direction indicated by an arrow L1 shown in Fig. 11A, the sliding element 202a is relatively moved on the cam surface 190 from the point X to the released cam surface area Y, abutted against the releasing stopper surface 190a<sub>3</sub> and stopped there. At this position, the extremity end of the sliding element 202a is engaged with the sliding element engaging part 190a<sub>2</sub>, so that even if the rearward outer cylinder 1b is removed, this is held at this position against the biasing force of the third resilient body 203 for use in return movement. Under this condition, the lead chuck 9 is kept at its released condition. Therefore, under this condition, if the

extremity end of the lead guide 4a is pushed against the paper sheet or the like, the slider 4 is retracted and stored in the tip element 3 together with the lead S and returned back to the condition shown in Fig. 1.

5           As described above in detail, according to the rotary knock type mechanical pencil of the present invention, the pencil is comprised of a cam cylinder having a cam surface at its extremity end and integrally rotated with the rearward outer cylinder; and a lead  
10       feeding mechanism including a lead guide having at its rear end a cam engaging means in the cam surface of the cam cylinder, a lead chuck capable of holding and releasing the lead connected to the extremity end stored in the forward outer cylinder in such a way as it may be  
15       advanced or retracted under rotation of the cam cylinder, a tightening ring for fastening or releasing the extremity end of the chuck fixed to the lead guide, a sleeve arranged at an outer circumference of the chuck and for restricting the movement of the ring toward its  
20       rear end to be advanced or retracted together with the chuck, and a slider arranged in the tip element at the extremity end of the shaft, holding an outer circumference of the lead with a specified frictional force and sliding in the tip element. The present invention has the  
25       following various effects.

At first, no looseness of the inner mechanism or the like is generated and a positive lead feeding operation

can be carried out when the lead feeding mechanism is advanced or retracted under a relative rotation of the forward outer cylinder and the rearward outer cylinder.

Secondly, the present invention is constructed such  
 5 that the cam engaging means advanced or retracted slidably contacted with the cam cylinder and the chuck are integrally formed, the sleeve acting as the fastener for fastening of the chuck and its releasing action is separately made, and each of the springs is arranged  
 10 between the sleeve and the inner circumferential surface of the fixed shaft and between the sleeve and the movable cam engaging means, so that even in case of performing of the rotary knock operation, a positive lead feeding operation can be performed under the action of these  
 15 springs.

Thirdly, the arrangement of the component elements in the shaft and various mechanisms constituted by the component elements are made simple irrespective of much or less amount of component elements, thereby a superior  
 20 workability in assembling operation of the inner mechanism can be attained and a manufacturing cost can be reduced to a less expensive value, trouble can be reduced while secular use is applied and further a maintenance cost can also be reduced.

25 Fourthly, each of the springs is arranged between the sleeve operating the chuck tightening member and the fixed shaft and between the sleeve and the movable shaft,

thereby reaction added to the lead and the lead feeding  
mechanism from the paper sheet in case that the writer  
showing a strong writing pressure performs a writing can  
be dampened under a combination of the springs and  
5 further a breakage of lead can be prevented and the  
writer can get a superior writing touch during writing  
operation.

WHAT IS CLAIMED IS:

1. A rotary knock type mechanical pencil comprising:

an outer body with a forward outer cylinder and a rearward outer cylinder;

a cam cylinder mounted within the outer body and operatively connected to the rearward outer cylinder, for rotation with the rearward outer cylinder; the cam cylinder having an extremity end with a cam surface; and a lead feeding mechanism fitted into the forward outer cylinder for feeding lead including

a) a lead guide having a rear end side and a cam engaging means on the rear end side, a lead chuck for holding and releasing the lead, the chuck having a front extremity end mounted in the forward outer cylinder and operatively connected to the cam cylinder in such a way as it may be advanced or retracted under rotation of said cam cylinder;

b) a tightening ring for tightening or releasing the extremity end of said chuck, and the front extremity end of the chuck being fixed to the lead guide;

a sleeve arranged around the chuck for restricting a movement of said ring advanced or retracted together with the chuck toward the rear end thereof; and

c) a tip element, a slider arranged in the tip element at the extremity end of the outer body, the slider holding an outer circumference of the lead with a specified frictional force and sliding in said tip element.



2. A mechanical pencil of the type having a lead feeding mechanism including a lead chuck fitted in a forward outer cylinder cooperatively operated to feed a lead under a rotation of a rearward outer cylinder rotatably and removably connected to the rear end of the forward outer cylinder comprising:

a cam engaging means integrally connected to the rear end of the lead chuck of said lead feeding mechanism and axially and movably inserted into said forward outer cylinder together with the lead feeding mechanism and engaged at its axial rotating direction; and a cam cylinder connected to said rearward outer cylinder, said cam cylinder being rotatably and removably inserted into the rearward inner part of said forward outer cylinder and having a cam surface means at the front end thereof, and

said cam cylinder being integrally rotated with said rearward outer cylinder to feed the lead.

3. A mechanical pencil as set forth in claim 2, further comprising a lead guide pipe abutting said lead feeding mechanism; and a tip element at an end of the forward outer cylinder opposite the rearward outer cylinder; and wherein said cam surface means includes

a large cam surface for sliding said cam engaging means in such a direction as a lead guide pipe is projected out of the tip element under a substantial

rotation in one direction and feeding in sequence the lead from said lead guide pipe under a low rotation after said projection; a small cam surface for sliding said cam engaging means in such a direction as releasing the chuck of said lead feeding mechanism under a rotation in another direction; an engaging part for locking said cam engaging means at a chuck releasing position of said lead feeding mechanism;

said lead guide pipe can be retracted and stored at said chuck releasing position.

4. A rotary knock type mechanical pencil comprising a forward outer cylinder and a rearward outer cylinder rotatably and removably connected to a rear end of the forward outer cylinder, a lead feeding mechanism fitted in the forward outer cylinder cooperatively operated to feed a pencil lead under a rotation of the rearward outer cylinder, rotary cam means arranged at a rear part of said lead feeding mechanism for feeding pencil lead in the lead feeding mechanism a driver connecting and fixing the rotary cam means for the rearward outer cylinder, and means for integrally holding and inserting the lead feeding mechanism and the rotary cam means with the driver into the rear end of said forward outer cylinder assembled to each other to make an integral formation, means for integrally connecting the formation with said forward outer cylinder, said driver including a

portion projected from the rear end of the forward outer cylinder after being integrally formed, and said portion being covered by the rearward outer cylinder.

5. A method for assembling a rotary knock type mechanical pencil including

providing a forward outer cylinder and a rearward outer cylinder rotatably and removably connected to a rear end of the forward outer cylinder;

providing a forward inner cylinder and a rearward inner cylinder;

providing an advancing or retracting means including a lead chuck for holding a pencil lead fixed at the front end, cam engaging means for converting a rotational force into an axial advancement or retracting movement connected at the rear end, a chuck tightening member arranged at the front end of the advancing or retracting means for fastening or releasing the front end of said lead chuck in a diametrical direction, and a sleeve for holding the lead to the chuck by restricting said rearward movement of the chuck tightening member;

providing a cam applying movement converting means including a cam cylinder with an engaging part at the rear end of the cylinder and with a cam surface formed at the front end surface of the cam cylinder to transmit the rotary movement of the cam cylinder to said advancing or retracting means as a reciprocating movement; providing

a drive means for rotating the cam cylinder with the forward outer cylinder; and further comprising the steps of:

first inserting said cam cylinder of said cam applying movement converting means into an extremity end side of the rearward inner cylinder with the engaging part projected from a rear end thereof; and then movably inserting the advancing or retracting means into the forward inner cylinder; and thereafter fixing the rear end of the forward inner cylinder to the front end of said rearward inner cylinder to make an integral formation;

then, connecting the drive means to the engaging part of the rear end of the cam cylinder projecting from the rear end of said integrally formed assembly; and then

inserting the integral formation with the connected drive means into the rear end of said forward outer cylinder, thereby the forward outer cylinder, rearward outer cylinder, the cam cylinder applying movement converting means and the advancing or retracting means are assembled in a simple manner.

6. A mechanical pencil comprising:

an outer hollow body including a tip element with an opening for passing a pencil lead therethrough, a forward outer cylinder having an extremity end abutting the tip element and a rear end opposite the extremity end, and a rearward outer cylinder rotatably connected to

the forward outer cylinder;

a cam cylinder mounted within the rear end of the forward outer cylinder for rotation relative to the forward outer cylinder, said cam cylinder including an extremity end with a cam;

drive means for rotating the cam cylinder with the rearward outer cylinder;

a lead feeding mechanism for holding and feeding the pencil lead through the opening fitted within the forward outer cylinder;

sleeve means removably held in place in the forward outer cylinder for integrally holding the lead feeding mechanism and the cam cylinder, the lead feeding mechanism being axially slidably mounted within and engaged with the sleeve means for axial movement relative to the forward outer cylinder;

the tip element being threadably connected to the sleeve means for holding the sleeve means in a fixed position relative to the outer forward cylinder; and

a cam engaging means mounted on the lead feeding mechanism and driven by the cam so that rotation of the rearward outer cylinder causes rotation of the cam cylinder and axial movement of the lead feeding mechanism relative to the forward outer cylinder.

7. A mechanical pencil as set forth in claim 6 wherein the cam cylinder includes a cam rod with an outer

circumferential surface, the cam rod being axially extended outwardly of the sleeve means within the outer forward cylinder and the drive means including a cylindrical fitting part disposed about the cam rod, and further comprising means for connecting the cylindrical fitting part to the cam rod.

8. A mechanical pencil as set forth in claim 7 wherein the connecting means includes a stepped part and a rotation preventive groove formed on the outer circumferential surface of the cam rod, and the cylindrical fitting part including an inner projecting piece engaged with the rotation preventive groove of the cam rod and an inner stepped part engaged with the stepped part of the cam rod.

9. A mechanical pencil as set forth in claim 8 wherein the rotation preventive groove comprises a bent groove.

10. A mechanical pencil as set forth in claim 7 wherein the connecting means includes a projecting part formed on the outer circumferential surface of the cam rod, and the cylindrical fitting part including a bent groove, and the projecting part being fitted in the bent groove.

11. A mechanical pencil as set forth in claim 7 wherein the connecting means includes a cam rod groove formed on the outer circumferential surface of the cam rod, the cylindrical fitting part having a fitting groove extended therethrough, the cam rod groove and the fitting groove being diametrically coincided, and a press engaging member inserted into the cam rod groove and fitting groove.

12. A mechanical pencil as set forth in claim 7 wherein the connecting means includes a cam rod groove formed as the outer circumferential surface of the cam rod, the cylindrical fitting having fitting groove extended therethrough, the cam rod groove and the fitting groove being diametrically coincided, and an arcular stopping cylinder mounted at least partially around the fitting part and including a portion press fitted through the fitting groove and into the cam rod groove.

13. A mechanical pencil as set forth in claim 6 wherein the lead feeding mechanism includes a lead chuck, a lead guide coupled to the lead chuck at a first end of the lead chuck and a cassette adapter including a cassette receiving bore connected to a second end opposite the first end of the lead chuck, and further comprising a cassette for containing a plurality of the pencil leads removably extended through the cam cylinder

and having an extremity end fitting in the cassette receiving bore.

14. A mechanical pencil as set forth in claim 6 wherein the sleeve means comprises an inner forward cylinder and an inner rearward cylinder connected to the inner forward cylinder.

15. A mechanical pencil as set forth in claim 7 wherein the sleeve means comprises an inner forward cylinder and an inner rearward cylinder connected to the inner forward cylinder.

16. A mechanical pencil as set forth in claim 15 wherein the lead feeding mechanism includes an axially extended rotation preventive projection and the rearward inner cylinder includes a rotation preventive groove in which the rotation preventive projection is slidably received for axial movement.

17. A mechanical pencil as set forth in claim 6 wherein the lead feeding mechanism includes an axially extended rotation preventive projection and the sleeve means includes a rotation preventive groove in which the rotation preventive projection is slidably received for axial movement.



FIG. 1

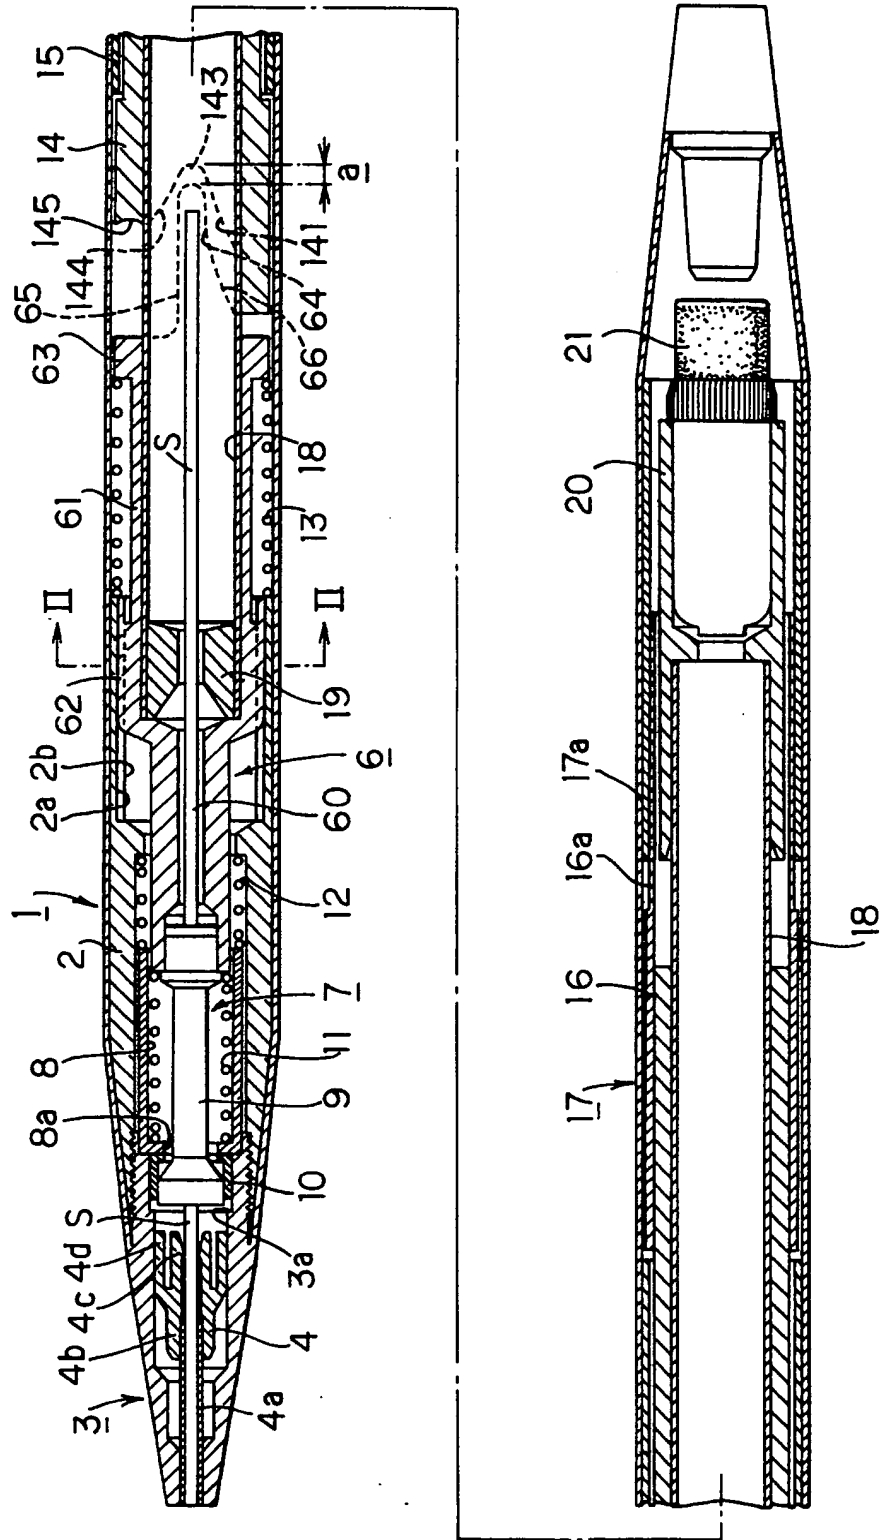


FIG. 2

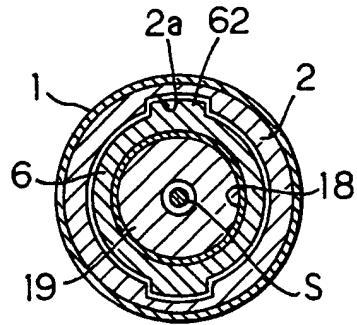


FIG. 3




FIG. 4

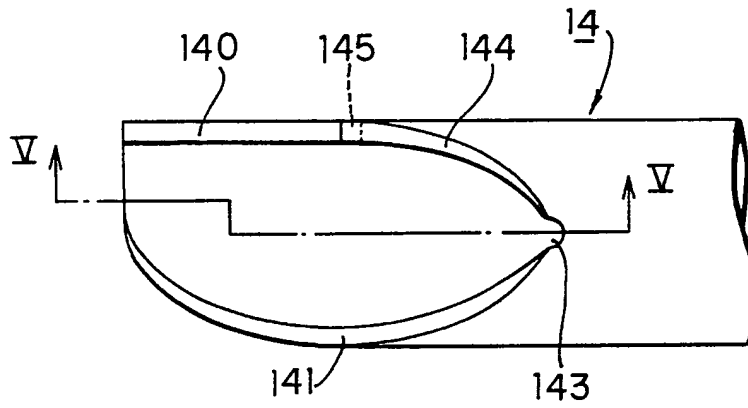


FIG. 5

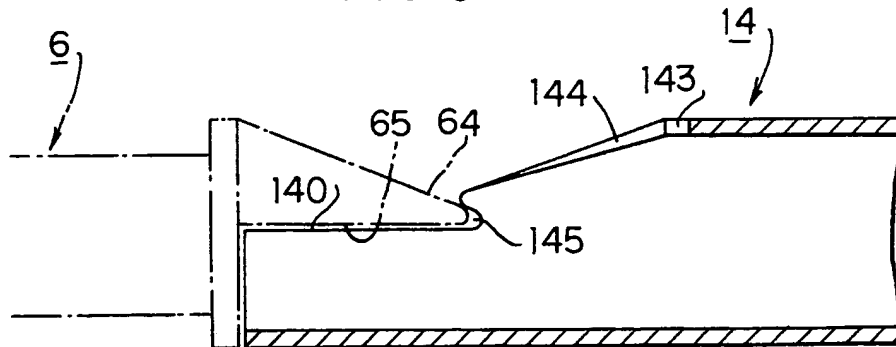


FIG. 6

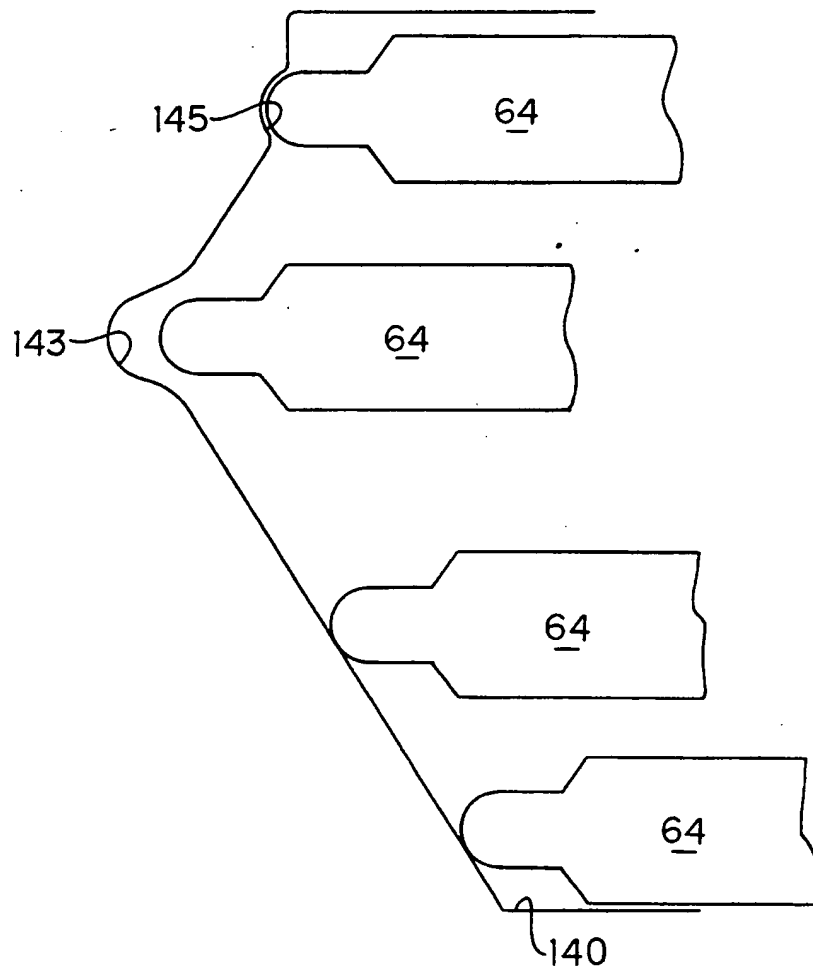


FIG. 7

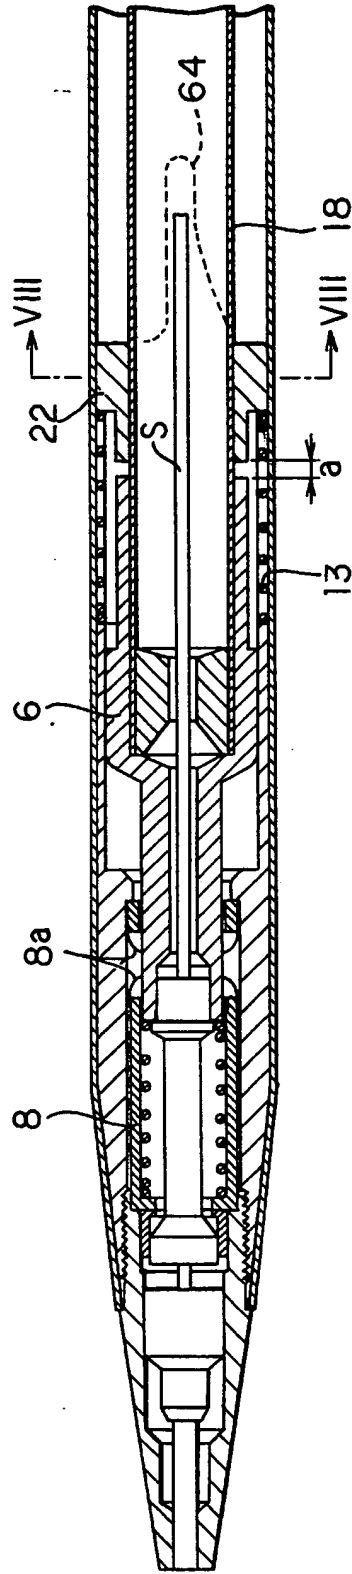


FIG. 8




FIG. 9A

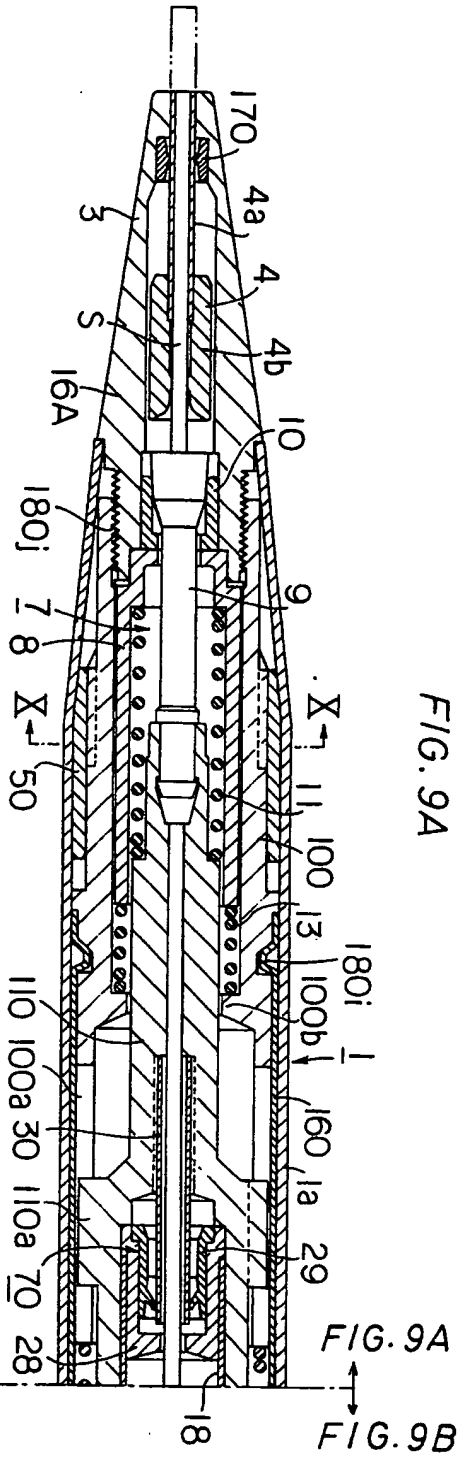


FIG. 10





FIG. 33A



FIG. 33B FIG. 33C



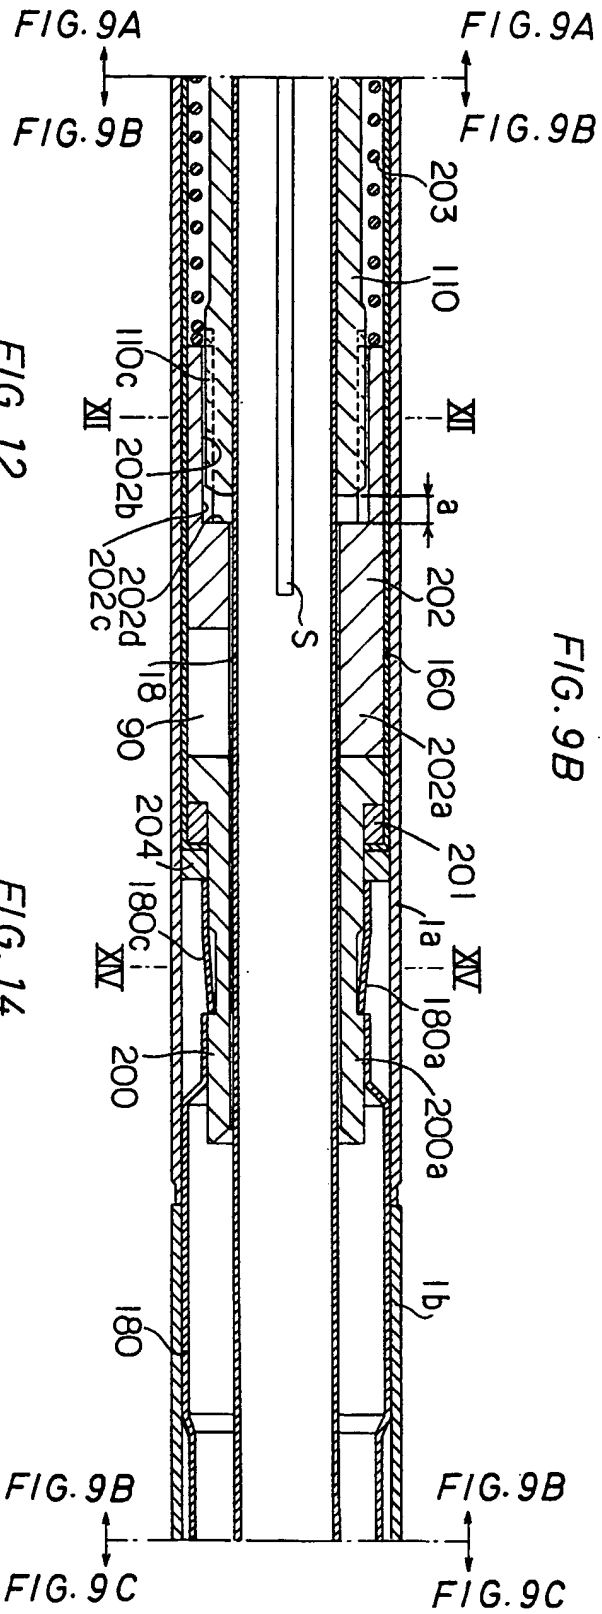


FIG. 9B

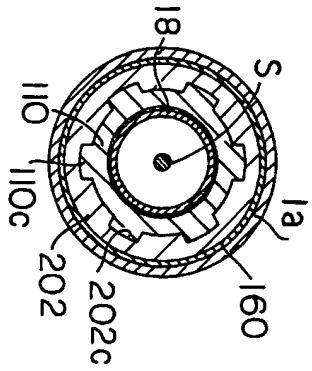


FIG. 12

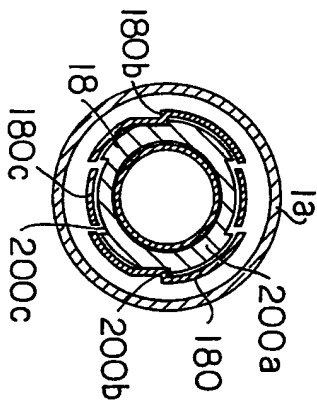


FIG. 14

FIG. 9C

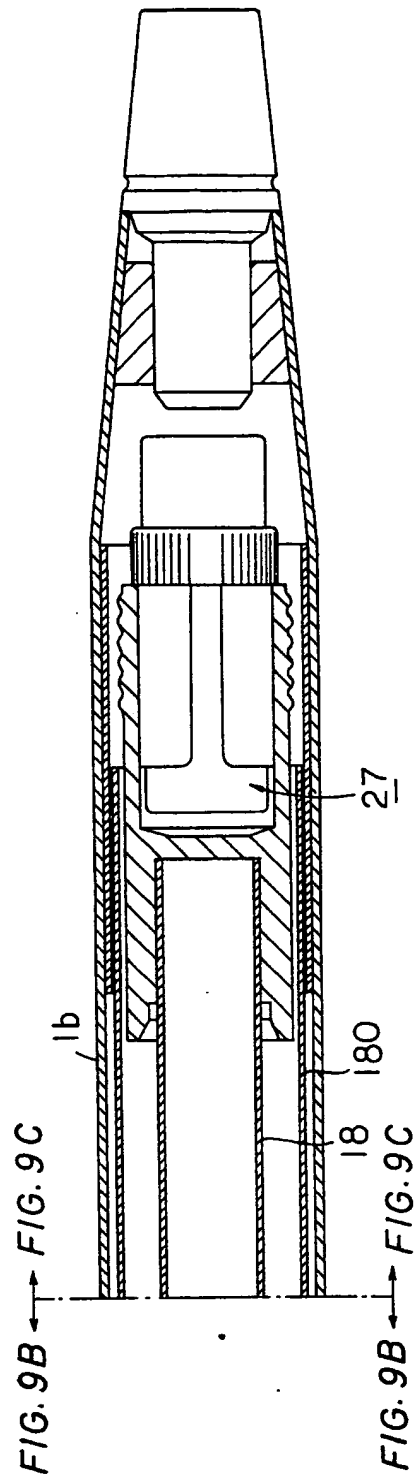


FIG. 11A

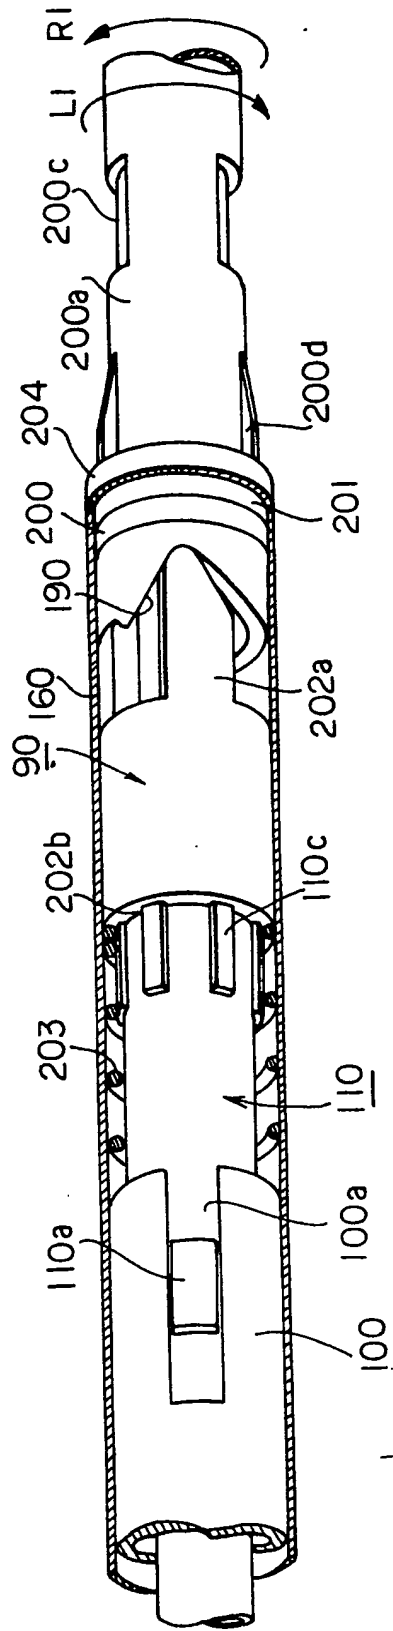


FIG. 11B

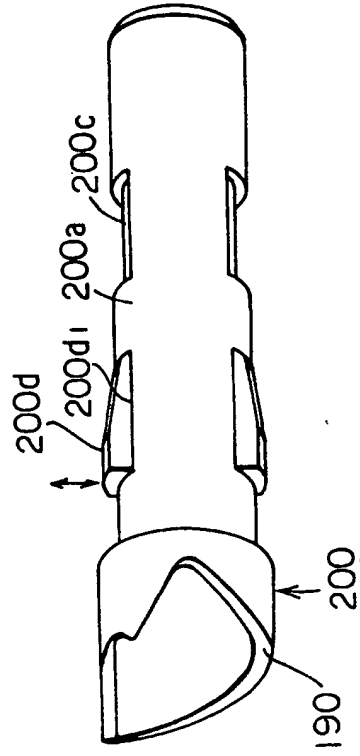




FIG. 13

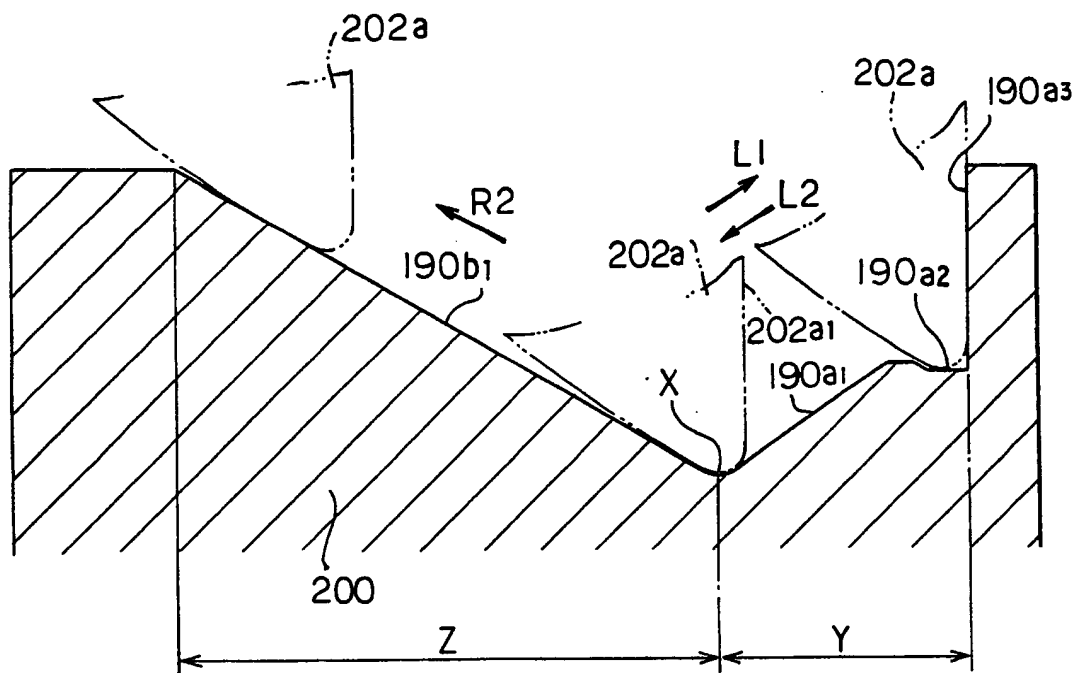


FIG. 15

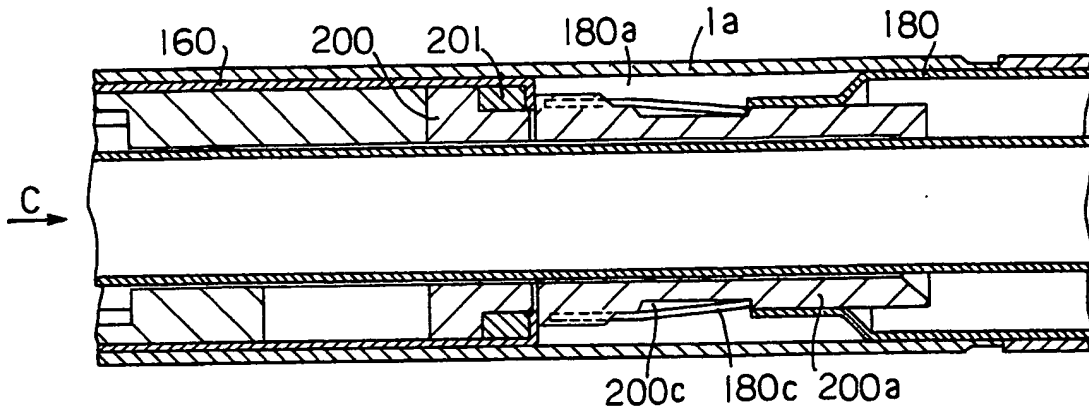


FIG. 18

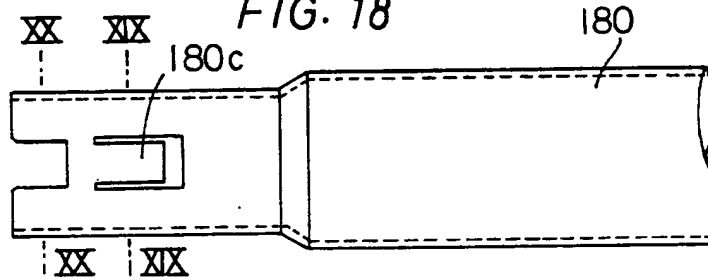


FIG. 19B




FIG. 19A




FIG. 17A




FIG. 17B




FIG. 16

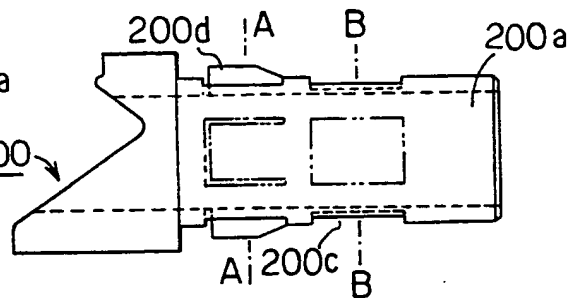


FIG. 20

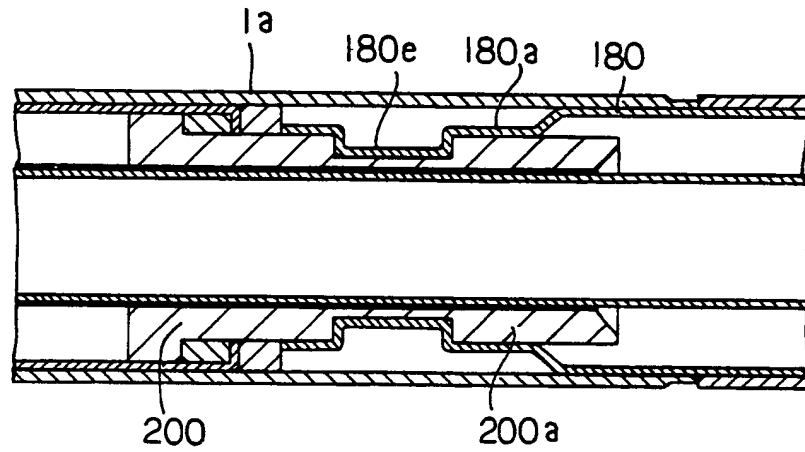


FIG. 22

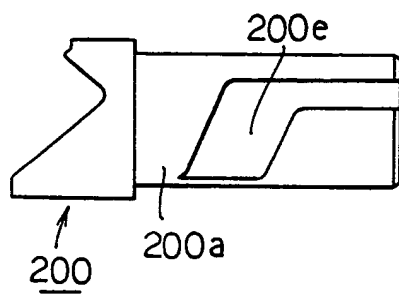


FIG. 21

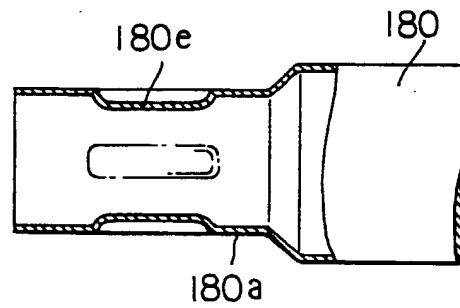


FIG. 23

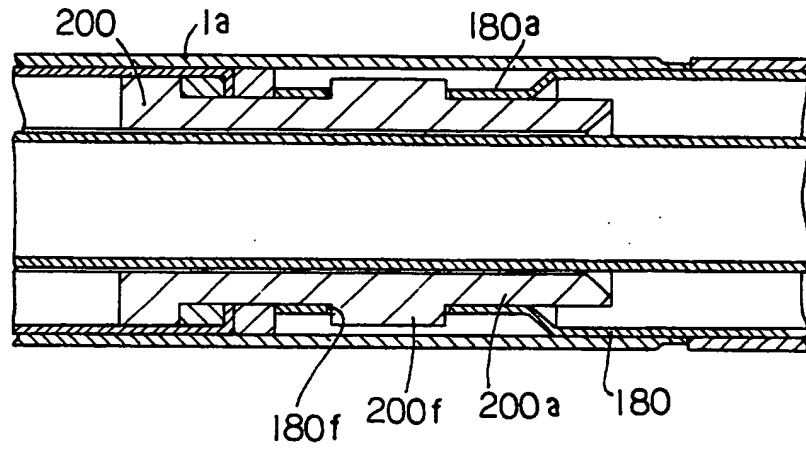


FIG. 25

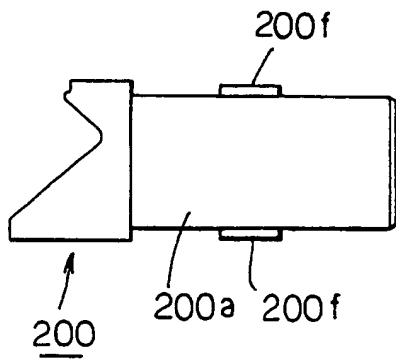


FIG. 24

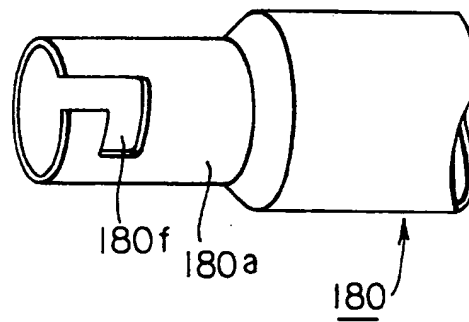


FIG. 26

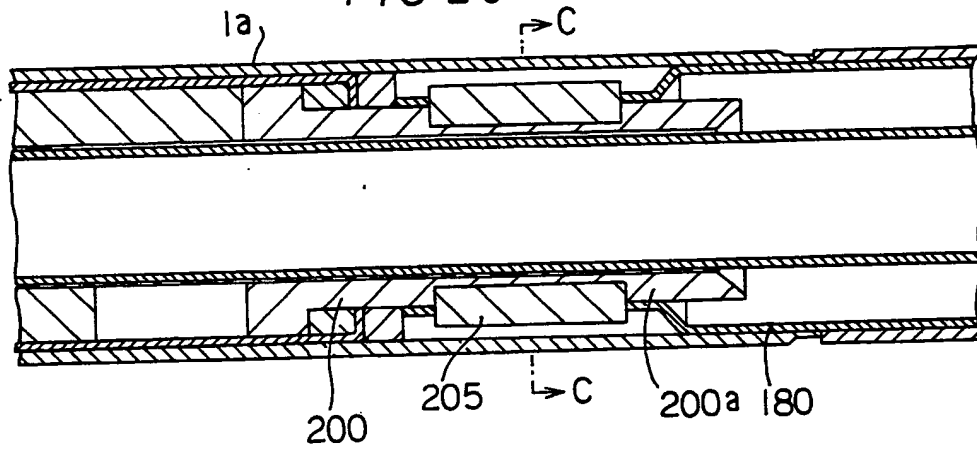


FIG. 27

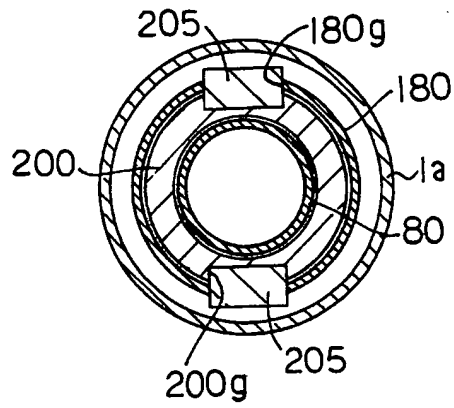


FIG. 28A




FIG. 28B




FIG. 28C




FIG. 29

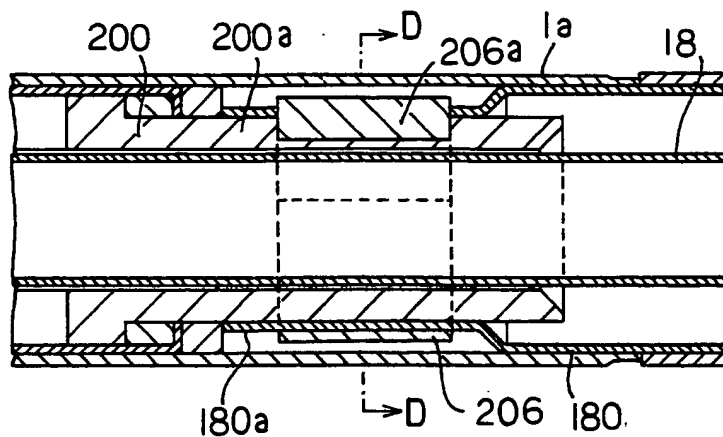


FIG. 32

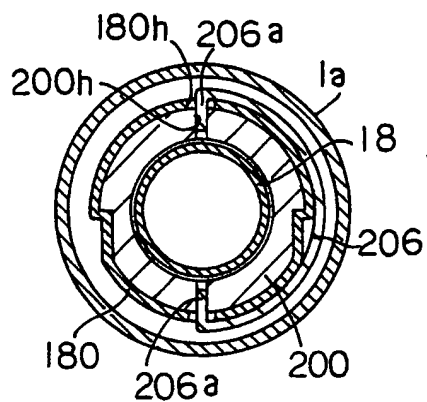


FIG. 30


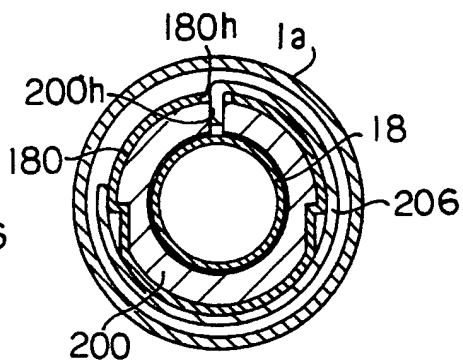


FIG. 31



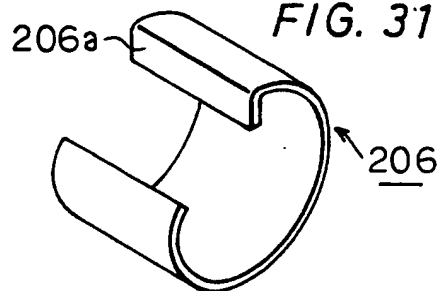

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number

EP 87 31 0356

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
X	FR-A-2 341 446 (FIRMA SCHMIDT) * Page 6, line 27 - page 12, line 29 in particular figures 4-7 *	2,4,6, 17	B 43 K 21/20
A	---	3,16	
D,X	DE-A-2 912 408 (ANCOS CO., LTD.) * Page 16, line 19 - page 26, line 5 *	1,2	
A	-----	3-6	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			B 43 K
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 04-02-1988	Examiner VAN OORSCHOT J.W.M.
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	